

## SPECIFICATIONS

General	Imperial	Metric
FLOOR TO TABLE SURFACE	32"	812.8 mm
MACHINE WEIGHT	11,000 lbs.	4,990 kg
CONSTRUCTION	Cast Iron Box Way X/Y/Z	
<b>Table</b>		
TABLE SIZE	48" x 20"	1,219.2 mm x 508 mm
T-S LOTS (NO. x WIDTH x SPAN)	5 x .709" x 3.74"	5 x 18 mm x 95 mm
CUTTING FEED RATE (X/Y/Z)	600 ipm max	15.24 mpm max
RAPID TRAVEL RATE (X/Y)	900 ipm	22.86 mpm
RAPID TRAVEL RATE (Z)	700 ipm	17.78 mpm
MAX. WEIGHT ON TABLE	3,641 lbs. <sup>c</sup>	1,651 kg <sup>c</sup>
BALL SCREW SIZE (X/Y/Z)	1.57" Dia .	40 mm Dia .
LONGITUDINAL (X AXIS)	40"	1,016 mm
LATITUDINAL (Y AXIS)	20"	508 mm
VERTICAL (Z AXIS)	20" (Opt. 28")	508 mm (Opt. 711.2 mm)
SPINDLE NOSE TO TABLE	4"-24" (4"-32" Op t.)	101.6 mm - 609.6 mm (101.6 mm - 81 2.8 Opt.)
SPINDLE CENTER TO COLUMN WAYS	20.11"	510.794 mm
<b>Accuracy</b>		
AXIS POSITIONING**	+/- .000 2"	+/- .0050 mm
AXIS REPEATABILITY**	+/- .000 1"	+/- .002 5 mm
<b>Spindle</b>		
POWER TRANSFER	Automatic Mechanical 2 speed VECTOR Drive	
SPINDLE SPEED	10-10,000 RPM	
SPINDLE ORIENTATION	Electromechanical	
SPINDLE TAPER	No. 40	
<b>Tools</b>		
ATC , NUMBER OF TOOLS	21	
ATC , TOOL S ELECTION	Random / Bi-directional	
MAX. TOOL DIAMETER	3"	76.2 mm
(WITHOUT ADJACENT TOOLS)	4.5"	114.3 mm
MAX. TOOL LENGTH	15"	381 mm
MAX. TOOL WEIGHT	15 lbs.	6.8 kg
<b>Motor</b>		
SPINDLE DRIVE MOTOR	AC, VECTOR Drive	
HORSEPOWER	10 HP / 14.7 HP*	7.5 kW / 11 kW*
TORQUE	70 ft.-lbs. / 124 ft.-lbs. *	95.4 N-m / 168 N -m*
OPT. HIGH TORQUE SPINDLE	24 HP* / 169 ft.-lbs. *	17.5 kW* / 229 N-m*
OPT. VERY HIGH TORQUE SPINDLE	29.8 HP* / 209 f t-lbs*	22.2 kW* / 283 N-m*
AXIS DRIVE MOTOR (X/Y/Z)	AC, 3,800 lbs.* thrust	AC, 1,724 kg* thrust
<b>Miscellaneous</b>		
AIR PRESSURE REQUIREMENT	80-120 PSI, 15 SCFM (Momentary)	5.5-8.3 Bar, .42m <sup>3</sup> /min (Momentary)
POWER REQUIREMENT (3-Phase)	65 A @ 230 V AC	
SINGLE PHASE (Optional)	Not Available	
COOL POWER	Spindle, X,Y,Z Ballscrews	

<sup>c</sup> Evenly Distributed Weight

\* Peak

\*\* All accuracies are quoted at 68°F.

Fadal reserves the right to change standard and optional machine accessories.




Extended column add 8" to height

Continuous equivalent A-weighted sound pressure at workstation is 77 db(A) or less during normal cutting operations.

## Options

- 28" Z Travel & Column (Standard 20")
- 30-Position ATC (CAT or BT)
- 24-Position DATC (CAT or BT)
- Spindle Options
  - 10,000 RPM High Torque
  - 10,000 RPM Very High Torque
  - 10,000 RPM Air/Oil Spindle
  - 15,000 RPM Air/Oil Spindle
- Coolant thru Spindle (250 psi)
- Chip Conveyor System
- Chip Conveyor System with Coolant Wash Down
- Ship Machine Un-Caulked
- Auto Aim Servo Coolant (Uses Spider Cool System)
- 480 Volt - 3 Phase Transformer
- Additional Work Light
- Expanded Memory Levels
  - 1280 Meter Memory (490K)
  - 2560 Meter Memory (980K)
  - 5120 Meter Memory (1960K)
  - 512 Mb Flashcard
- Data Server (Includes High Speed Ethernet)
- Tool Offset - 499 Pairs or 999 Pairs
- Stored Stroke Check Limit before Move
- Circle Radius (9 Digits)
- Polar Coordinate Interpolation
- 300 Work Piece Coordinates
- Machine Time Stamp Function
- Conical Spiral Interpolation
- Registered Programs 400 or 1000
- Mold 3
- Mold 5 (RISC Server, HPCC, Data Server)
- Heidenhain Glass Scales
- Renishaw Touch Probes
  - TS-27R Tool Setter Probe
  - MP-12 Probe System
- Rotary Products
  - VH-165 mm
  - VH-175 mm
  - VH-225 mm
  - VH-275 mm
  - TR-165 mm (5-Axis)
  - V-300 mm
  - V-400 mm
  - Rotary Accessories
- Midaco Pallet Changer
- Tooling Packages
  - (11) Tool Starter Package
  - (20) Tool Premium Package
  - Tooling Certificates

## VMC 4020 TABLE DIMENSIONS

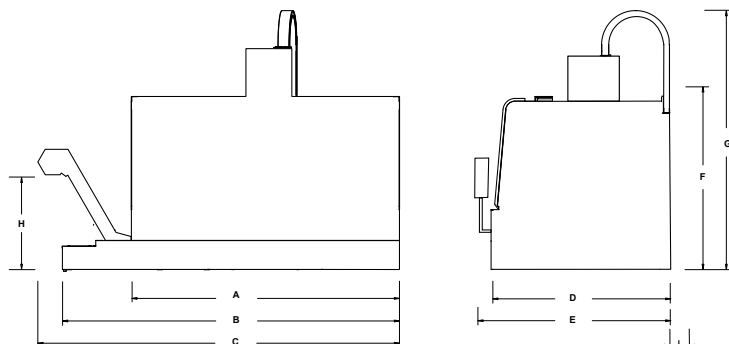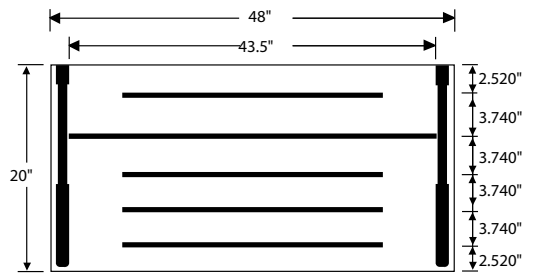

Front View

Side View

## VMC 4020 DIMENSIONS

A	117	F	92
B	146	G	119
C	157	H	41
D	79	I	18
E	103-124		

[www.dinsmoreinc.com](http://www.dinsmoreinc.com)

Dinsmore & Associates, Inc.

1681 Kettering Street, Irvine, CA 92614

Telephone (714) 641-7111 • Fax (714) 641-3111



## SPECIFICATIONS

General	Imperial	Metric
FLOOR TO TABLE SURFACE	31"	787.4 mm
MACHINE WEIGHT	8,550 lbs.	3,878 kg
CONSTRUCTION	Cast Iron Box Way X/Y/Z	
<b>Table</b>		
TABLE SIZE	39" x 16"	990.6 mm x 406.4 mm
T-SLOTS (N O. x WIDTH x SPAN)	3 x .709" x 4.33"	3 x 18 mm x 110mm
CUTTING FEED RATE (X/Y/Z)	600 ipm max	15.24 mpm max
RAPID TRAVEL RATE (X/Y)	900 ipm	22.86 mpm
RAPID TRAVEL RATE (Z)	700 ipm	17.78 mpm
MAX. WEIGHT ON TABLE	2,736 lbs. <sup>c</sup>	1,241 kg <sup>c</sup>
BALL SCREW SIZE	1.58" Dia.	40 mm Dia.
LONGITUDINAL (X AXIS)	30"	762 mm
LATITUDINAL (Y AXIS)	16"	406.4 mm
VERTICAL (Z AXIS)	20" (Opt. 28")	508 mm (Opt. 711.2 mm)
SPINDLE NOSE TO TABLE	4"-24" (4"-32" Opt.)	101.6 mm - 609.6 mm (101.6 mm - 812.8 Opt.)
SPINDLE CENTER TO COLUMN WAYS	16.1"	408.94 mm
<b>Accuracy</b>		
AXIS POSITIONING**	+/- .0002"	+/- .0050 mm
AXIS REPEATABILITY**	+/- .0001"	+/- .0025 mm
<b>Spindle</b>		
POWER TRANSFER	Automatic Mechanical, 2 speed VECTOR Drive	
SPINDLE SPEED	10-10,000 RPM	
SPINDLE ORIENTATION	Electromechanical	
SPINDLE TAPER	No. 40	
<b>Tools</b>		
ATC, NUMBER OF TOOLS	21	
ATC, TOOL SELECTION	Random / Bi-directional	
MAX. TOOL DIAMETER	3"	76.2 mm
(WITHOUT ADJACENT TOOLS)	4.5"	114.3 mm
MAX. TOOL LENGTH	15"	381 mm
MAX. TOOL WEIGHT	15 lbs.	6.8 kg
<b>Motor</b>		
SPINDLE DRIVE MOTOR	AC, VECTOR Drive	
HORSEPOWER	10 HP / 15 HP*	7.5 kW / 11.2 kW*
TORQUE	60 ft.-lbs. / 160 ft.-lbs.*	81 N-m / 217 N-m*
OPT. HIGH TORQUE SPINDLE	22.5 HP* & 220 ft.-lbs.*	16.8 kW* / 298 N-m*
AXIS DRIVE MOTOR (X/Y/Z)	AC, 3,800 lb s.* thrust	AC, 1,724 kg* thrust
<b>Miscellaneous</b>		
AIR PRESSURE REQUIREMENT	80-120 PSI, 15 SCFM (Momentary)	5.5-8.3 Bar, .42m <sup>3</sup> /min (Momentary)
POWER REQUIREMENT (3- Phase)	42 A @ 230 V AC	
OPTIONAL SINGLE PHASE	60 A @ 220 VAC	
COOL POWER	Spindle, X,Y,Z B allscrews	

## Options


- 28" Z Travel & Column (Standard 20")
- Spindle Options
  - 7,500 RPM 1:1 Drive
  - 10,000 RPM High Torque
  - 10,000 RPM Air/Oil Spindle
  - 15,000 RPM Air/Oil Spindle
- No Cool Power Option
- Coolant thru Spindle (250 psi)
- Rigid Tapping
- Chip Conveyor System
- Flat Sheet Metal Cover
- Ship Machine Un-Caulked
- Auto Aim Servo Coolant
- Single Phase Transformer
- 480 Volt - 3 Phase Transformer
- Additional Work Light
- Remote Manual Pulse Generator
- 32MP Control
  - Ability to Network
  - High Capacity Hard Drive
  - Shop Floor Programming
- Expanded Memory Levels
  - 422K RAM Memory
  - 4 MB RAM Memory
  - 8 MB RAM Memory
  - 16 MB RAM Memory
- 3.5" Floppy Disk Drive
- Heidenhain Glass Scales
- Renishaw Touch Probes
  - TS-27R Tool Setter Probe
  - MP-11 Probe System
  - MP-12 Probe System
- Rotary Products
  - VH-5C
  - VH-165 mm
  - VH-175 mm
  - VH-225 mm
  - Rotary Accessories
- Midaco Pallet Changer
- Tooling Packages
  - (11) Tool Starter Package
  - (20) Tool Premium Package
  - Tooling Certificates

## VMC 3016 TABLE DIMENSIONS

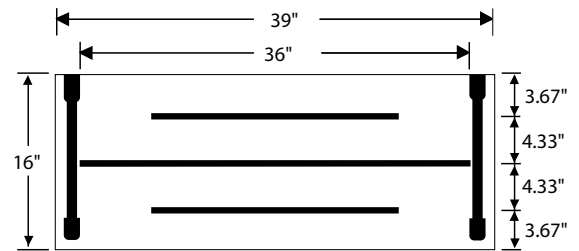


T-SLOT

<sup>c</sup> Evenly Distributed Weight  
<sup>\*</sup> Peak  
<sup>\*\*</sup> All accuracies are quoted at 68°F.  
 Fadal reserves the right to change standard and optional machine accessories.  
 Extended column add 8" to height  
 Continuous equivalent A-weighted sound pressure at workstation is 77 db(A) or less during normal cutting operations.

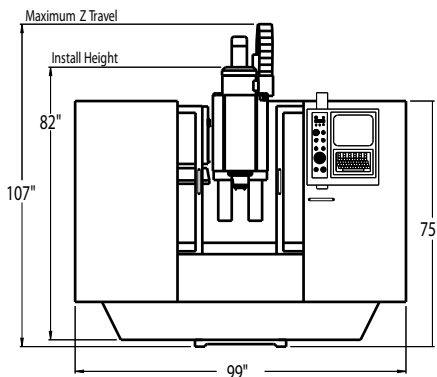

Front View

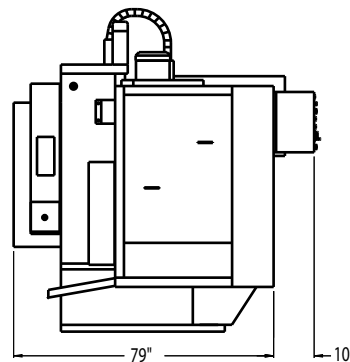

Side View

## Dinsmore & Associates, Inc.

1681 Kettering Street, Irvine, CA 92614

Telephone (714) 641-7111 • FAX (714) 641-3111

www.dinsmoreinc.com  
 sales@dinsmoreinc.com